

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Краснодар (861)203-40-90	Санкт-Петербург (812)309-46-40
Астана (7172)727-132	Красноярск (391)204-63-61	Саратов (845)249-38-78
Астрахань (8512)99-46-04	Курск (4712)77-13-04	Севастополь (8692)22-31-93
Барнаул (3852)73-04-60	Липецк (4742)52-20-81	Симферополь (3652)67-13-56
Белгород (4722)40-23-64	Магнитогорск (3519)55-03-13	Смоленск (4812)29-41-54
Брянск (4832)59-03-52	Москва (495)268-04-70	Сочи (862)225-72-31
Владивосток (423)249-28-31	Мурманск (8152)59-64-93	Ставрополь (8652)20-65-13
Волгоград (844)278-03-48	Набережные Челны (8552)20-53-41	Сургут (3462)77-98-35
Вологда (8172)26-41-59	Нижний Новгород (831)429-08-12	Тверь (4822)63-31-35
Воронеж (473)204-51-73	Новокузнецк (3843)20-46-81	Томск (3822)98-41-53
Екатеринбург (343)384-55-89	Новосибирск (383)227-86-73	Тула (4872)74-02-29
Иваново (4932)77-34-06	Омск (3812)21-46-40	Тюмень (3452)66-21-18
Ижевск (3412)26-03-58	Орел (4862)44-53-42	Ульяновск (8422)24-23-59
Казань (843)206-01-48	Оренбург (3532)37-68-04	Уфа (347)229-48-12
Калининград (4012)72-03-81	Пенза (8412)22-31-16	Хабаровск (4212)92-98-04
Калуга (4842)92-23-67	Пермь (342)205-81-47	Челябинск (351)202-03-61
Кемерово (3842)65-04-62	Ростов-на-Дону (863)308-18-15	Череповец (8202)49-02-64
Киров (8332)68-02-04	Рязань (4912)46-61-64	Ярославль (4852)69-52-93
	Самара (846)206-03-16	

Единый адрес: snw@nt-rt.ru **Веб-сайт:** www.swan.nt-rt.ru

Датчики Retracon SWAN. Техническое описание

Two-electrode conductivity sensor for the continuous measurement in water/steam cycle applications with retractable wet-tap valve.

Swansensor Retracon, retractable sensor with wet-tap valve

Conductivity sensor with stainless steel body, stainless steel electrode and built-in temperature probe for automatic temperature compensation.

Specifications

Recommended measuring range:

0.055 $\mu\text{S}/\text{cm}$ to 1'000 $\mu\text{S}/\text{cm}$ (for $K=0.05$)
0.05 $\mu\text{S}/\text{cm}$ to 60 mS/cm (for $K=10.0$)

Accuracy (at 25°C): $\pm 1\%$ or 0.02 $\mu\text{S}/\text{cm}$
whichever is greater

Cell constant: $\sim 0.05 \text{ cm}^{-1}$ for low conductivity
 $\sim 10.0 \text{ cm}^{-1}$ for high conductivity

Temperature sensor type: Pt1000

Operating conditions:

- Continuous temperature: 150 °C
- Pressure: max. 3.4 bar

Materials in contact with sample:

- Electrode: Stainless steel SS 316L
- Insulator: Teflon

Process connection: 1 " NPT for valve or
DN25 flange SS316


Dimensions*:

- Total length: $\sim 420\text{mm}$
- Insertion length: ~ 76 to 228mm past thread
- Sensor diameter: 19mm
*: Dimension can vary.

Restriction of use:
only for use with AMI Powercon Transmitter.

Electrical connection:

- stripped and tinned 24 gauge ends

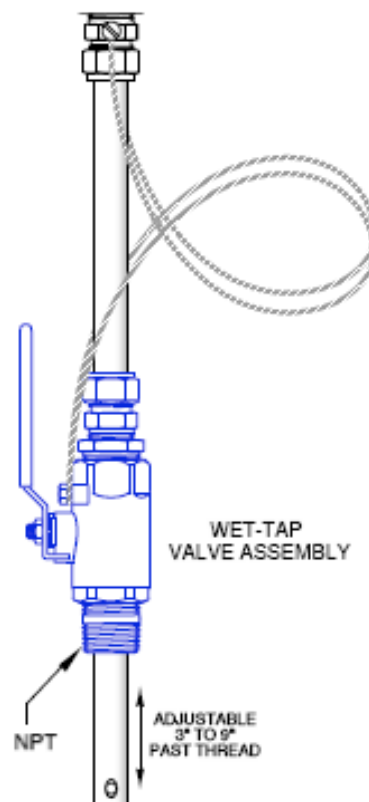

Connection scheme to AMI Powercon:

Terminal	Cable color	Function
19	BLK	Inner Electrode
20	WHT & Clear	Outer Electrode & Shield
21	RED	PT1000
22	GRN	PT1000

Order scheme	Swansensor Retracon	A – 87 . 381 .			
Cell constant	0.05 cm^{-1} for low conductivity	3	↑	↑	↑
	10.0 cm^{-1} for high conductivity	8			
Cable length	None, without cable	0			
	Cable 10 Feet (~ 3 meter)	1			
	Cable 20 Feet (~ 6 meter)	5			
	Cable 50 Feet (~ 15 meter)	7			
Process Connection	1" NPT thread	0			
	DN25 flange, SS316	1			

Two-electrode conductivity sensor for the continuous measurement in water/steam cycle applications with retractable wet-tap valve.

Swansensor RetraconHP, high pressure, retractable sensor with wet-tap valve

Conductivity sensor with stainless steel body, stainless steel electrode and built-in temperature probe for automatic temperature compensation.

Specifications

Recommended measuring range:

0.055 $\mu\text{S/cm}$ to 1'000 $\mu\text{S/cm}$ (for K=0.05)

0.05 $\mu\text{S/cm}$ to 60 mS/cm (for K=10.0)

Accuracy (at 25°C): $\pm 1\%$ or 0.02 $\mu\text{S/cm}$
whichever is greater

Cell constant: $\sim 0.05 \text{ cm}^{-1}$ for low conductivity
 $\sim 10.0 \text{ cm}^{-1}$ for high conductivity

Temperature sensor type: Pt1000

Operating conditions:

- Continuous temperature: 120 °C
- Pressure: max. 12 bar

Materials in contact with sample:

- Electrode: Stainless steel SS 316L
- Insulator: Teflon

Process connection: $\frac{3}{4}$ " NPT for valve or
DN25 flange SS316

Dimensions:


- Total length: $\sim 420\text{mm}$
- Insertion length: 76 to 228mm past thread
- Sensor diameter: 12.7mm
*: Dimension can vary.

Restriction of use:

only for use with AMI Powercon Transmitter.

Electrical connection:

- stripped and tinned 24 gauge ends

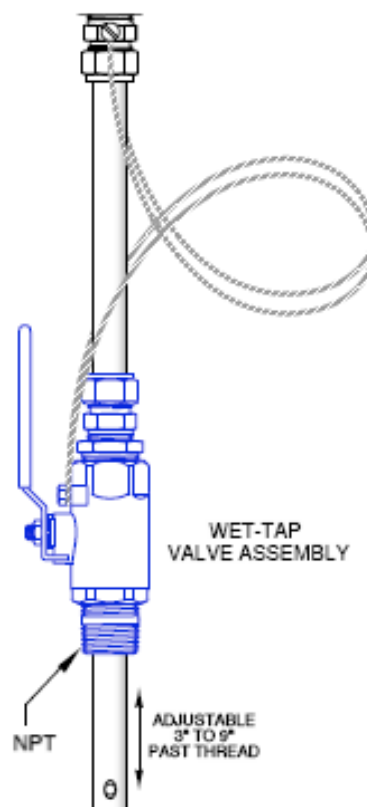

Connection scheme to AMI Powercon:

Terminal	Cable color	Function
19	BLK	Inner Electrode
20	WHT & Clear	Outer Electrode & Shield
21	RED	PT1000
22	GRN	PT1000

Order scheme	Swansensor RetraconHP	A – 87 . 382 .			
Cell constant	0.05 cm^{-1} for low conductivity	3	↑	↑	↑
	10.0 cm^{-1} for high conductivity	8			
Cable length	None, without cable	0			
	Cable 10 Feet (~3 meter)	1			
	Cable 20 Feet (~6 meter)	5			
	Cable 50 Feet (~15 meter)	7			
Process Connection	$\frac{3}{4}$ " NPT thread	0			
	DN25 flange, SS316	1			

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Краснодар (861)203-40-90	Санкт-Петербург (812)309-46-40
Астана (7172)727-132	Красноярск (391)204-63-61	Саратов (845)249-38-78
Астрахань (8512)99-46-04	Курск (4712)77-13-04	Севастополь (8692)22-31-93
Барнаул (3852)73-04-60	Липецк (4742)52-20-81	Симферополь (3652)67-13-56
Белгород (4722)40-23-64	Магнитогорск (3519)55-03-13	Смоленск (4812)29-41-54
Брянск (4832)59-03-52	Москва (495)268-04-70	Сочи (862)225-72-31
Владивосток (423)249-28-31	Мурманск (8152)59-64-93	Ставрополь (8652)20-65-13
Волгоград (844)278-03-48	Набережные Челны (8552)20-53-41	Сургут (3462)77-98-35
Вологда (8172)26-41-59	Нижний Новгород (831)429-08-12	Тверь (4822)63-31-35
Воронеж (473)204-51-73	Новокузнецк (3843)20-46-81	Томск (3822)98-41-53
Екатеринбург (343)384-55-89	Новосибирск (383)227-86-73	Тула (4872)74-02-29
Иваново (4932)77-34-06	Омск (3812)21-46-40	Тюмень (3452)66-21-18
Ижевск (3412)26-03-58	Орел (4862)44-53-42	Ульяновск (8422)24-23-59
Казань (843)206-01-48	Оренбург (3532)37-68-04	Уфа (347)229-48-12
Калининград (4012)72-03-81	Пенза (8412)22-31-16	Хабаровск (4212)92-98-04
Калуга (4842)92-23-67	Пермь (342)205-81-47	Челябинск (351)202-03-61
Кемерово (3842)65-04-62	Ростов-на-Дону (863)308-18-15	Череповец (8202)49-02-64
Киров (8332)68-02-04	Рязань (4912)46-61-64	Ярославль (4852)69-52-93
	Самара (846)206-03-16	

Единый адрес: snw@nt-rt.ru **Веб-сайт:** www.swan.nt-rt.ru